
OPTICAL

SYSTEMS

DESIGN

OPERATOR MANUAL

OSD370B

14 – CARD CHASSIS WITH OSD921

POWER SUPPLY WITH NMS

CONTENTS

1	TECHNICAL SUMMARY	1
1.1	BRIEF DESCRIPTION	1
1.1.1	OVERVIEW	1
1.1.2	APPLICATIONS	1
1.1.3	FEATURES AND BENEFITS	1
1.2	TECHNICAL SPECIFICATIONS	1
2	PHYSICAL DIMENSIONS	2
3	INSTALLATION AND OPERATION	3
3.1	OSD921 POWER SUPPLY OPERATION	3
3.2	IMPORTANT INSTALLATION REQUIREMENTS	3
3.3	BACK PLANE OUTPUTS	3
4	MAINTENANCE	4
4.1	EXTERNAL INSPECTION	4
4.2	ROUTINE MAINTENANCE	4
5	WARRANTY	4
5.1	WARRANTY PERIOD	4
5.2	REPAIRS	4
5.2.1	WARRANTY REPAIRS	4
5.2.2	OUT-OF-WARRANTY REPAIRS	4
5.2.3	SITE REPAIRS	4
5.2.4	EXCLUSIONS	4

OPTICAL SYSTEMS DESIGN

1 TECHNICAL SUMMARY

1.1 BRIEF DESCRIPTION

1.1.1 OVERVIEW

The OSD370B is a 19" 3RU (133mm) high rack mounting chassis, which accepts one OSD921 power supply module plus from one to fourteen OSD standard card format plug-in modules. The system employs a 9-pin female D connector at each position for card powering and for the OSD Network Management slot addressing. The plug-in power supply is capable of providing power for almost any combination of plug-in cards but it is suggested that the user confirm that his projected combination of cards can be supported by the OSD921 power supply unit. Individual product data sheets provide the Chassis Current Consumption (CCC) for each plug-in card: the total of these must be less than the rating of the OSD921 Power Supply Unit, ie 6 Amp total

1.1.2 APPLICATIONS

- ▲ Use where OSD fiber optic cards required


1.1.3 FEATURES AND BENEFITS

- ▲ Compact 3RU high, 19" rack mounting unit
- ▲ Holds up to 14 5T-width OSD standard-sized cards
- ▲ Requires one OSD921 power supply unit
- ▲ Supports any combination of OSD cards

1.2 TECHNICAL SPECIFICATIONS

Specification	Performance
Electrical	
Input	100 - 264V AC 50-60Hz (using OSD921)
Fusing	1A delayed action fuse
Physical	
Form factor	Designed to fit standard 19 inch rack
Outer dimensions (mm)	483W x 265D x 133H
Weight	4.0kg (with OSD921 power supply)

2 PHYSICAL DIMENSIONS

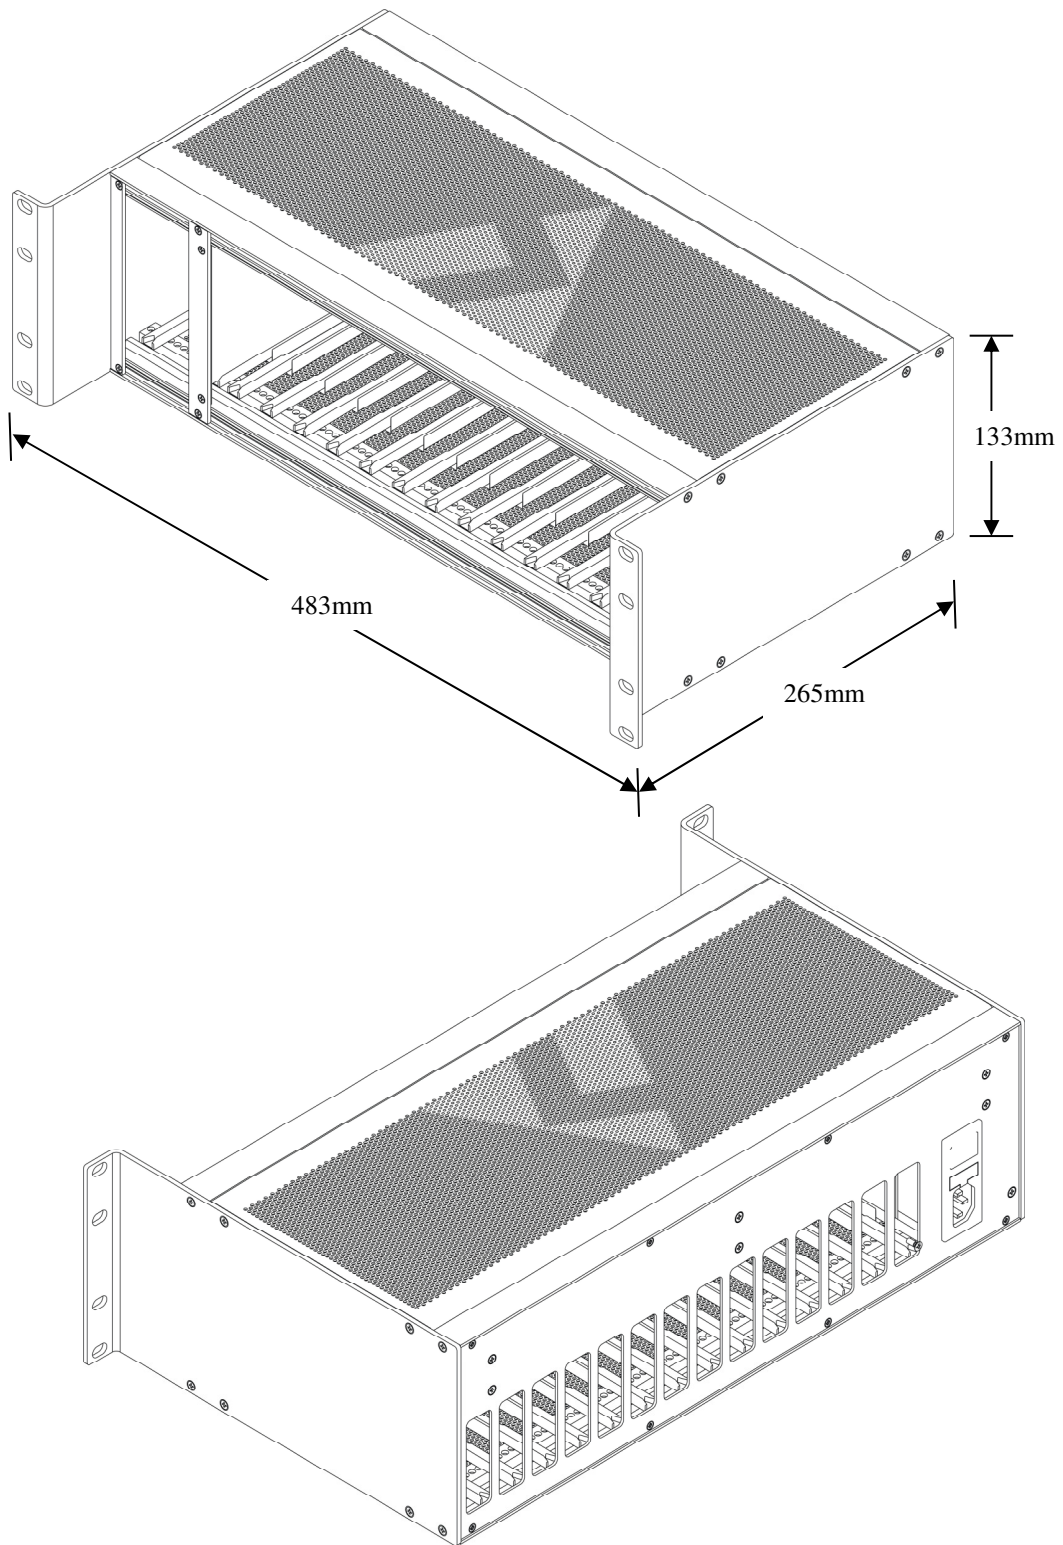

3 INSTALLATION AND OPERATION

3.1 OSD921 POWER SUPPLY OPERATION

The OSD370B uses an OSD921 power supply unit.

A front panel mounted LED indicator on the OSD921 illuminates when the power supply unit is switched on. Front panel test points are available on the OSD921 for monitoring the 12VDC output of the supply. Note that the test point outputs are current limited and cannot be used as a power source.

The OSD921 supply has a built-in cooling fan.

The cooling fan operates only when high temperatures are experienced on the power supply whilst under heavy load and/or high ambient temperatures.

The fan may not continuously operate and under low load or low ambient temperatures it may not operate at all.

The **Temperature Alarm** LED on the front panel of the OSD921 is green during normal operation and will be red when the operating temperature exceeds the normal operating limits of the supply.

Do not continue to operate the power supply when the Temperature Alarm LED is red and take steps to rectify the cause of the excessive high temperature indication.

3.2 IMPORTANT INSTALLATION REQUIREMENTS

It is important to provide a cool operating environment as well as to provide adequate ventilation.

The OSD370B chassis must be separated by at least a 1RU (about 44mm) gap above and below the unit to provide ventilation.

The ventilation holes of the chassis must never be covered by any objects.

3.3 BACK PLANE OUTPUTS

The OSD370B is merely a mechanical chassis, so electrical specifications are not given, other than the pin outs for the 9-pin D female connector of the back plane.

DB9 Pin	Specification
1	NMS Address Bit 1
2	NMS Address Bit 2
3	+12V _{DC} nominal
4	NMS Address Bit 3
5	D+
6	Ground
7	Ground
8	NMS Address Bit 4
9	D-

4 MAINTENANCE

4.1 EXTERNAL INSPECTION

Visually check the following:

- ▲ Check that the correct power source is connected to the power socket

4.2 ROUTINE MAINTENANCE

- ▲ There is no routine maintenance required with the OSD370B.

5 WARRANTY

OSD warrants that at the time of shipment, its products are free from defects in material and workmanship and conforms to specifications. Our Warranty conditions are outlined below:

5.1 WARRANTY PERIOD

For warranty period and repair service please call your local OSD distributor.

5.2 REPAIRS

Optical Systems Design reserves the right to repair or replace faulty modules/units. Please obtain a "Return Material Authorisation" (RMA) form and number before returning goods. Goods must be returned in adequate packing material to Optical Systems Design, Warriewood, Australia or its nominated authorised representative, for all repairs.

5.2.1 WARRANTY REPAIRS

Return shipments to OSD shall be at customer's expense and freight back to the customer will be at OSD expense.

5.2.2 OUT-OF-WARRANTY REPAIRS

OSD reserves the right to repair or replace any faulty goods. Freight costs and insurance for both journeys are met by the user. All equipment repaired by OSD will have a 3-month warranty from the date of dispatch.

5.2.3 SITE REPAIRS

By agreement site repairs may be undertaken for which out of pocket, hotel and travel expenses will be charged.

5.2.4 EXCLUSIONS

This warranty does not apply to defects caused by unauthorized modifications, misuse, abuse or transport damage to the equipment. All modifications to OSD's standard product will need written authorization and will be charged at normal repair rates. All modifications are to be carried out by OSD Technicians. Warranty is void if unauthorized removal and/or tampering with serial number and/or repair labels is evident.

Optical Systems Design Pty. Ltd.

7/1 Vuko Pl. Warriewood 2102

P.O. Box 891 Mona Vale

N.S.W. Australia 2103

Telephone: +61 2 9913 8540

Facsimile: +61 2 9913 8735

Email: sales@osd.com.au

Web Site: www.osd.com.au

OPTICAL

SYSTEMS

DESIGN

PTY LTD

A.B.N. 83 003 020 504

Printed in Australia