

OSD2254 6-PORT REDUNDANT RING GIGABIT ETHERNET SWITCH

APPLICATIONS


- ▲ Any network utilising a mix of copper and fiber
- ▲ Industrial IP communications
- ▲ Self-healing Gigabit Ethernet backbone networks
- ▲ Networks using Ethernet devices such as cameras, intercoms, access control, telephones, etc

FEATURES AND BENEFITS

- ▲ Complies with IEEE802.3i/802.3u/802.3ab 10/100/1000Base-T, IEEE802.3u 100Base-Fx, IEEE802.3z 1000Base-Lx/Sx standards
- ▲ Has a total of six ports: four fixed copper ports for 10/100/1000Base-T and two SFP ports for the fibre ring or non-ring (100Base-Fx or 1000Base-X)
- ▲ A network diameter of hundreds of kilometers is practical
- ▲ Ring reconfiguration in the case of cable or switch failures takes less than two milliseconds per hop
- ▲ MDI/MDIX Crossover: no need for crossover cables
- ▲ Can be used with either singlemode or multimode fiber over a variety of link budgets
- ▲ Available for operation in Ring or point-to-point configuration
- ▲ Available for operation over 1 or 2 fibers
- ▲ Auto-Negotiation for half or full duplex operation
- ▲ Supports 10KB jumbo frames
- ▲ Powered by non-critical 10 to 36VDC or 24VAC supplies
- ▲ Operates over the temperature range of -20 to +75°C
- ▲ OSDview Lite Network Management System
- ▲ Compatible with the OSD2244 and OSD2251 Gigabit Ethernet switches
- ▲ DIN rail mounting
- ▲ SFP module sold separately



TYPICAL SYSTEM DESIGN

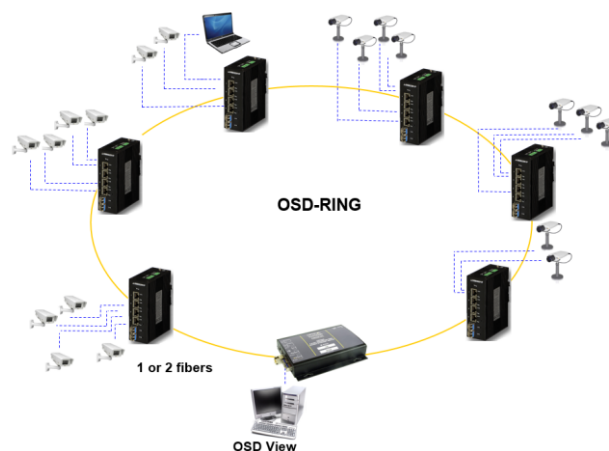

ORDERING INFORMATION

OSD2254	Industrial 6-port Redundant Ring Gigabit Ethernet Switch
OSD2254P	PoE version of OSD2254
SFP Module	See OSD SFP datasheet #1021000XX



SPECIFICATIONS

ELECTRICAL

Electrical Data Interface	IEEE802.3i/802.3u/802.3ab, 10/100/1000Base-T Ethernet
Electrical Data Rate	10, 100, 1000Mbps with energy detect, auto negotiate, auto MDIX
Jumbo Frame Support	10KB
Optical Data Interface	IEEE802.3z 1000Base-Lx/Sx or IEEE802.3u 100Base-Fx
Optical Data Rate	100Mbps or 1000Mbps user selectable
Operating Mode	Ring or non-ring user selectable Half or full duplex for 10/100 Full duplex for 1000 Flow control
Electrical Data Connectors	RJ45
Alarms	Ring to Bus High Temperature
Alarm Interface	Opto-isolated MOSFET rated at 100mA @ 46V maximum

OPTICAL

Optical Port Connectors	SFP
SFP Options	Short haul, long haul, single fiber operation, etc. Please consult OSD datasheet #1021000XX or contact OSD

PHYSICAL

Operating Temperature Range	-20 to +75°C
Relative Humidity	0 to 95% non-condensing
Power Requirements	+10V to +36V DC or 22 to 28VAC @ 10VA

Power Connector	4 way 5.08mm terminal block
Alarm Connector	4 way 3.5mm terminal block
Indicators	4x Copper Link on RJ45s 4x Copper Activity on RJ45s 2x SFP Speed/Activity/Link on SFPs 1x Power/Temperature Alarm 1x Initialise/Ring/Bus
Dimensions of Module (mm)	43W x 91D x 130H
Weight of Module (kg)	0.5